

WARRIOR SERIES

620W



High Reliability



Higher Energy Yield

J-TOPCon New technology

Higher module efficiency, higher energy yield
Lower system BOS cost, lower LCOE, and higher ROI



Snowstorm Resistance



Hurricane Resistance



Lower Temperature Coefficient




Lower Operating Temperature



Lower Hot Spot Temperature



IEC 61215(2021)/IEC 61730(2023)/IEC 61701/IEC 62716
ISO 9001:2015: Quality Management System
ISO 14001:2015: Environment Management System
ISO 45001:2018: Occupational health and safety
IEC 62941:2019: Quality system for PV module manufacturing

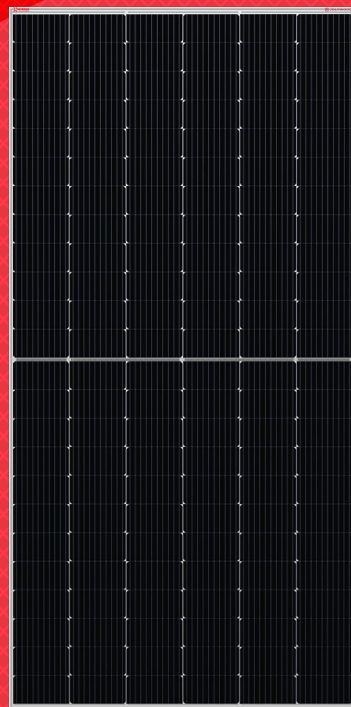

Lower Carbon Emissions


Compared with traditional aluminum frames, carbon emissions of steel frames are reduced by 73.3.3%




Hail Resistance



Burst Resistance



Linear Performance Warranty

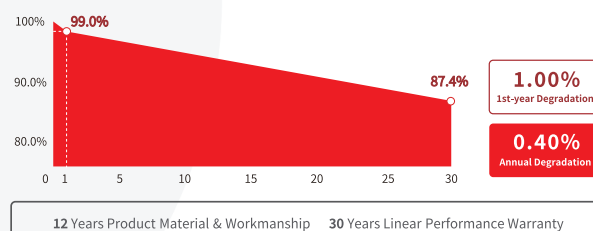

Version 2025.07 ©Jolywood (Taizhou) Solar Technology Co., Ltd. All rights reserved.

Maximum Power Output **620W**

Maximum Module Efficiency **23.0%**

Power Output Tolerance **0~+3%**



UAN: +92-21-111-209-988



www.aptinverex.com



info@aptinverex.com

Electrical Properties | STC*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	620	625	630	635	640	645
MPP Voltage (Vmp) (V)	41.10	41.28	41.46	41.64	41.82	42.00
MPP Current (Imp) (A)	15.08	15.14	15.19	15.25	15.30	15.36
Open Circuit Voltage (Voc) (V)	47.89	48.09	48.29	48.49	48.69	48.89
Short Circuit Current (Isc) (A)	15.92	15.97	16.02	16.07	16.12	16.17
Module Efficiency (%)	23.0	23.1	23.3	23.5	23.7	23.9

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5
The data above is for reference only and the actual data is in accordance with the practical testing
Power Measurement Tolerance ±3%

Electrical Properties | NMOT*

Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	464	468	472	476	479	483
MPP Voltage (Vmp) (V)	39.36	39.53	39.70	39.87	40.05	40.22
MPP Current (Imp) (A)	11.80	11.84	11.89	11.93	11.97	12.01
Open Circuit Voltage (Voc) (V)	45.85	46.04	46.23	46.43	46.62	46.81
Short Circuit Current (Isc) (A)	12.86	12.90	12.94	12.98	13.02	13.06

*NMOT: Irradiance 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

Operating Properties

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V (IEC)
Maximum Series Fuse Rating	35A
Maximum Static Load*	Front side 7200Pa, Rear side 2400Pa

*For detailed information, please refer to the Installation Manual

Temperature Coefficient


Temperature Coefficient of Pmax	-0.280%/°C
Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Isc	+0.045%/°C
Nominal Operating Cell Temperature	45±2°C

Specification


Number of Cells	132pcs
Module Dimension	2382mm*1134mm*29mm
Weight	28.2kg
Front Glass	2.8mm Tempered glass
Backsheet	White
Frame	Aluminum-Magnesium-Zinc Coated Steel
Junction Box	IP68 (3 diodes)
Length of Cable	4.0mm ² , +300mm/-180mm (Cable length can be customized)
Packaging Configuration	36pcs/Pallet, 720pcs/40HQ Container

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.


Engineering Drawing (unit: mm)

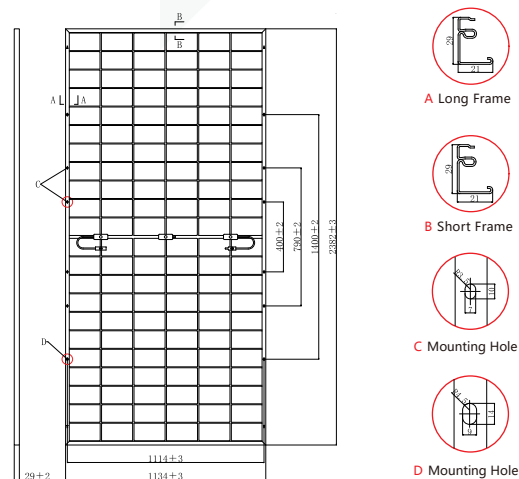

Characteristic Curves

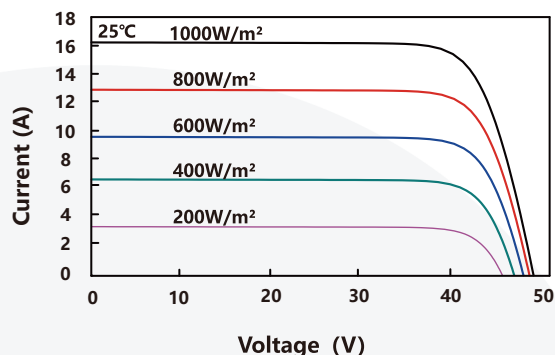

I-V Characteristics At Different Irradiations

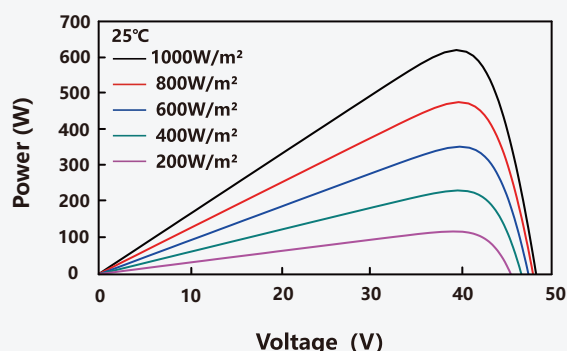

P-V Characteristics At Different Irradiations

